



nassli
LED LIGHTS


LED LINEAR S

Application:

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room, Theater, Cinemas, Kitchens and Corridor

Feature:

The product used as pure light source , using LED technology human and environment friendly, no PB, Hg nor UV. Do not cause any flickering and electromagnetic interference. High power saving fixture, no decay and color temperature shift.

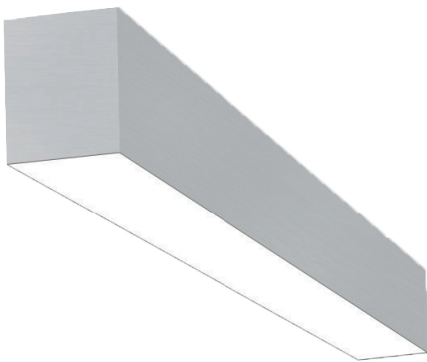

SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	220 - 240 VAC
Frequency	50 / 60 Hz
Power Factor	>98%
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80%
LED Efficiency	120 - 130Lm/W
Power supply	Tridonic / Nassli / Philips /Osram
LED Type	Osram / Epistar
Materials	Aluminum, PC, & Friendly material
Beam Angle	160°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	Suspended / Recessed / Surface
IP Rating	IP20
Dimmable	On Request
Emergency	On Request
Warranty	5 Years



nassli
LED LIGHTS

LED LINEAR S

Order code	Dimensions(mm)	Power(Watt)	Lumen
NSL-LLS-T-50x80x1000-CC-15W/M-XXK-SMD-TD-XX-IP20	W5 H8	15	1650
NSL-LLS-T-50x80x1000-CC-20W/M-XXK-SMD-NS-XX-IP20	W5 H8	20	2200
NSL-LLS-T-50x80x1000-CC-20W/M-XXK-SMD-TD-XX-IP20	W5 H8	20	2200
NSL-LLS-T-50x80x1000-CC-30W/M-XXK-SMD-TD-XX-IP20	W5 H8	30	3300
NSL-LLS-T-50x80x1000-CC-40W/M-XXK-SMD-NS-XX-IP20	W5 H8	40	4400
NSL-LLS-T-50x80x1000-CC-40W/M-XXK-SMD-TD-XX-IP20	W5 H8	40	4400

Order code	Dimensions(mm)	Power(Watt)	Lumen
NSL-LLS-T-50x80x1000-CV24-20W/M-XXK-SMD-NS-IP20	W5 H8	20	2200
NSL-LLS-T-50x80x1000-CV24-20W/M-XXK-SMD-TD-XX-IP20	W5 H8	20	2200
NSL-LLS-T-50x80x1000-CV24-20W/M-XXK-SMD-PH-XX-IP20	W5 H8	20	2200
NSL-LLS-T-50x80x1000-CV24-30W/M-XXK-SMD-NS-IP20	W5 H8	30	3300
NSL-LLS-T-50x80x1000-CV24-30W/M-XXK-SMD-TD-XX-IP20	W5 H8	30	3300
NSL-LLS-T-50x80x1000-CV24-30W/M-XXK-SMD-PH-XX-IP20	W5 H8	30	3300

Order code	Dimensions(mm)	Power(Watt)	Lumen
NSL-LLS-94.3x91.8x1000-DIF-CC-20W/M-XXK-SMD-NS-XX-IP20	W94.3 H91.8	20	2200
NSL-LLS-94.3x91.8x1000-DIF-CC-20W/M-XXK-SMD-TD-XX-IP20	W94.3 H91.8	20	2200
NSL-LLS-94.3x91.8x1000-DIF-CC-30W/M-XXK-SMD-TD-XX-IP20	W94.3 H91.8	30	3300
NSL-LLS-94.3x91.8x1000-DIF-CC-40W/M-XXK-SMD-NS-XX-IP20	W94.3 H91.8	40	4400
NSL-LLS-94.3x91.8x1000-DIF-CC-40W/M-XXK-SMD-TD-XX-IP20	W94.3 H91.8	40	4400
NSL-LLS-94.3x91.8x1000-DIF-CC-45W/M-XXK-SMD-TD-XX-IP20	W94.3 H91.8	45	4950
NSL-LLS-94.3x91.8x1000-DIF-CC-50W/M-XXK-SMD-TD-XX-IP20	W94.3 H91.8	50	5500
NSL-LLS-94.3x91.8x1000-DIF-CC-60W/M-XXK-SMD-NS-XX-IP20	W94.3 H91.8	60	6600
NSL-LLS-94.3x91.8x1000-DIF-CC-60W/M-XXK-SMD-TD-XX-IP20	W94.3 H91.8	60	6600



nassli
LED LIGHTS

LED LINEAR S

Order code	Dimensions(mm)	Power(Watt)	Lumen
NSL-LLS-70x80x1000-CC-15W/M-XXK-SMD-TD-XX-IP20	W7 H8	15	1650
NSL-LLS-70x80x1000-CC-20W/M-XXK-SMD-NS-XX-IP20	W7 H8	20	2200
NSL-LLS-70x80x1000-CC-20W/M-XXK-SMD-TD-XX-IP20	W7 H8	20	2200
NSL-LLS-70x80x1000-CC-30W/M-XXK-SMD-TD-XX-IP20	W7 H8	30	3300
NSL-LLS-70x80x1000-CC-40W/M-XXK-SMD-NS-XX-IP20	W7 H8	40	4400
NSL-LLS-70x80x1000-CC-40W/M-XXK-SMD-TD-XX-IP20	W7 H8	40	4400

Order code	Dimensions(mm)	Power(Watt)	Lumen
NSL-LLS-70x80x1000-CV24-20W/M-XXK-SMD-NS-IP20	W7 H8	20	2200
NSL-LLS-70x80x1000-CV24-20W/M-XXK-SMD-TD-XX-IP20	W7 H8	20	2200
NSL-LLS-70x80x1000-CV24-20W/M-XXK-SMD-PH-XX-IP20	W7 H8	20	2200
NSL-LLS-70x80x1000-CV24-30W/M-XXK-SMD-NS-IP20	W7 H8	30	3300
NSL-LLS-70x80x1000-CV24-30W/M-XXK-SMD-TD-XX-IP20	W7 H8	30	3300
NSL-LLS-70x80x1000-CV24-30W/M-XXK-SMD-PH-XX-IP20	W7 H8	30	3300

Order code	Dimensions(mm)	Power(Watt)	Lumen
NSL-LLS-94.3x91.8x1000-DIF-CV24-30W/M-XXK-SMD-NS-IP20	W94.3 H91.8	30	3300
NSL-LLS-94.3x91.8x1000-DIF-CV24-30W/M-XXK-SMD-TD-XX-IP20	W94.3 H91.8	30	3300
NSL-LLS-94.3x91.8x1000-DIF-CV24-30W/M-XXK-SMD-PH-XX-IP20	W94.3 H91.8	30	3300
NSL-LLS-94.3x91.8x1000-DIF-CV24-40W/M-XXK-SMD-NS-IP20	W94.3 H91.8	40	4400
NSL-LLS-94.3x91.8x1000-DIF-CV24-40W/M-XXK-SMD-TD-XX-IP20	W94.3 H91.8	40	4400
NSL-LLS-94.3x91.8x1000-DIF-CV24-40W/M-XXK-SMD-PH-XX-IP20	W94.3 H91.8	40	4400
NSL-LLS-94.3x91.8x1000-DIF-CV24-45W/M-XXK-SMD-NS-IP20	W94.3 H91.8	45	4950
NSL-LLS-94.3x91.8x1000-DIF-CV24-45W/M-XXK-SMD-TD-XX-IP20	W94.3 H91.8	45	4950
NSL-LLS-94.3x91.8x1000-DIF-CV24-45W/M-XXK-SMD-PH-XX-IP20	W94.3 H91.8	45	4950
NSL-LLS-94.3x91.8x1000-DIF-CV24-60W/M-XXK-SMD-NS-IP20	W94.3 H91.8	60	6600
NSL-LLS-94.3x91.8x1000-DIF-CV24-60W/M-XXK-SMD-TD-XX-IP20	W94.3 H91.8	60	6600
NSL-LLS-94.3x91.8x1000-DIF-CV24-60W/M-XXK-SMD-PH-XX-IP20	W94.3 H91.8	60	6600