



nassli
LED LIGHTS


LED EXIT LIGHT SING D

Application:

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas, Kitchens and Corridor etc...

Feature:

The product used as pure light source , LED line of exit and emergency lighting offer the best in energy efficiency and is perfect for many applications, including damp location. These well designed, units are low maintenance and provide the brightest light while using very little energy, and 24 metre viewing distance.

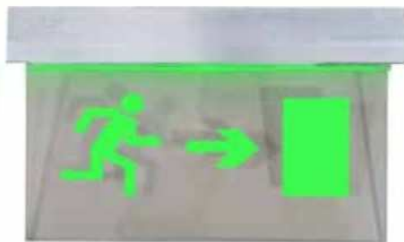

SPECIFICATIONS

ITEM	DESCRIPTION
Input Voltage	220 - 240 V A C
Frequency	50 / 60 H z
Power factor	>95%
CCT	Green
CRI	>83%
Power supply	Nassli
LED Type	Epistar High Power
Materials	Aluminum, PC, & Friendly material
Beam Angle	180°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +65°C
Certifications	CE, SELV and ISO
Mounting	Pendant , Wall Mounted
IP Rating	IP20 / IP40
Dimmable	NO
Emergency	Yes
Warranty	5 Years

Order code	Dimensions(mm)	Power(Watt)
NSL-EXIT-D-SM-5W-HIP-DON-DF-IP20	L33.5 H22	5
NSL-EXIT-D-RE-5W-HIP-DON-DF-IP20	L33.5 H22	5
NSL-EXIT-D-WM-5W-HIP-DON-DF-IP20	L33.5 H22	5
NSL-EXIT-D-SM-5W-HIP-DON-DF-IP40	L33.5 H22	5
NSL-EXIT-D-RE-5W-HIP-DON-DF-IP40	L33.5 H22	5
NSL-EXIT-D-WM-5W-HIP-DON-DF-IP40	L33.5 H22	5

NASSLI LED Factory C.R. 1010328884
www.nassli-led.com.sa Kingdom of Saudi Arabia
Riyadh (Head Office), P.O. Box25320 Riyadh 11466, UN: 920004733